



ISO Certifications



Follow us @



ADJUSTABLE TELESCOPIC PROP
Outer Size made from 60.3mm OD Inner size made from 48.3mm OD M.S. Pipes

Prop.	Height in mtr.		Safe Axial load in kg.	
	Closed	Extended	Closed	Extended
ON	1.10	1.75	3500	3000
1N	1.50	2.75	3200	2300
2N	2.00	3.25	3000	2200
3N	2.00	3.75	2900	2000
4N	3.00	4.65	2300	1150



ADJUSTABLE PROPS

ADJUSTABLE TELESCOPIC SPAN

Size	Range, Min.	Max.
ESO + ESI	1.75	2.70
SO + ESI	2.40	3.45
SO + SI	2.45	4.16
SO + LI	3.05	4.75
LO + SI	3.10	4.90
LO + LI	3.10	5.50



ADJUSTABLE TELESCOPIC SPAN



DROP HEAD



ADJUSTABLE JACK WITH BASE U-HEAD



INFILL BEAM



METRIFORM BEAM (Q.S. BEAM)



Horizontal / Ledger Size 0.60 to 2.50 mtrs.



Vertical/Standard Size 0.50 to 3.00 mtrs.



GANGWAY PLANK



H-FRAME



WALLFORM PANEL



HAUNCH PANEL



HEAVY DUTY SOLDIER



BARRICADE



BRIDGE TOWER



STEEL LINER (Type-A)



STEEL LINER (Type-B)

DIFFERENT TYPES OF COUPLERS & CLAMPS

Forged Swival / Rotating



Size : 40 / 40 mm

Forged Fixed / Double



Size : 40 / 40 mm

Sheet Swival / Rotating



Size : 40/40, 40/50, 50/50

Sheet Fixed / Double



Size : 40 / 40 mm

Forged Wedge Swival / Rotating



Size : 40 / 40 mm

Forged Wedge Swival / Rotating



Size : 40 / 40 mm

Putlog



Size : 40 / 40 mm

Sleeve



Size : 40 / 40 mm

Toe Board Bracket



Size : 40 mm

Cuplock Assembly & Fittings



Ledger Blade (Hole Type)



Ledger Blade (Without Hole)



C-Clamp (Left & Right)



Size :

Girder Coupler



Size : 40 mm Pipe

Top Cup



Bottom Cup



TIE ROD & FITTINGS

Waller Plate



Wing Nut



3-Wing Anchor Nut



Water Barrier (Without Disc)



2-Wing Anchor Nut



Water Barrier (Disc Type)



Tie Rod



Base Jack



Size : 32, 34, 36, 38 mm

U-Jack



Size : 32, 34, 36, 38 mm

Universal Jack



Size : 32, 24, 26, 38 mm

Stirrup Head



Size : 32 mm

Base Jack



Size : 32 mm

Stirrup Nut



Size :
1.5 Inch Pipe Seating

Jack Nut (Casting)



Stirrup Nut



Size :
2 Inch Pipe Seating

Jack Nut (Forging)




Prop Nut (Casting)



A. Heavy Type



B. Export Type



C. Neck Type


Prop Sleeve




Neck type

Export Type


Locking Pin

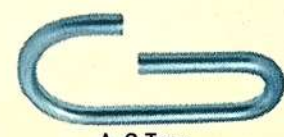

A. G-Type

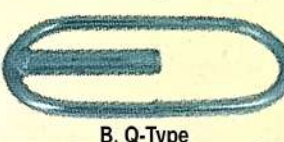


B. Q-Type



C. Rope Type


Doka Clamp (Beam Clamp)

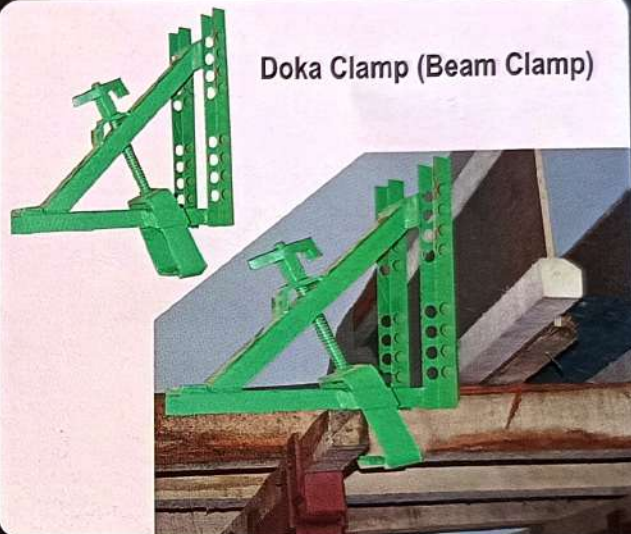

Different models of Base Plate.




A. 2 Inch Pipe



B. 2.5 mm Strip



C. 1 inch Pipe



D. Rocking Base Plate



E. Socket Base Plate

Prop Top Plate* 100 x 350 & 300 x 6 mm



Prop Bottom Plate* 150 x 150 x 6



Prop Washer
ID: 50 mm

* Hole type and without hole type available


Scaffolding Stand Wheel



Break Type

Ordinary


Brace Locks

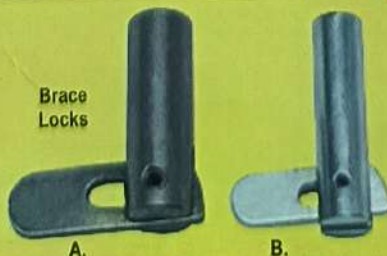

A.

B.

H-FRAME

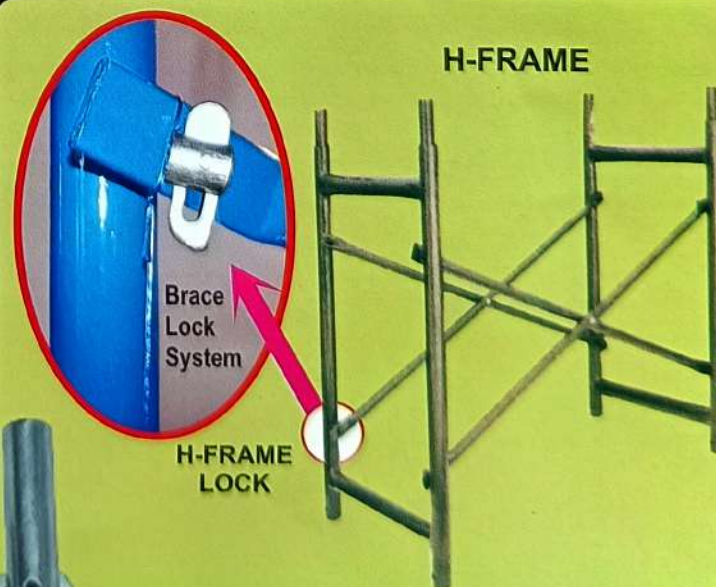

Brace Lock System

H-FRAME LOCK

Span Bolt & Nut Accessories



Nut



Step Nut

Span Bolt.
3/4 x 93 mm



Step Bolt
3/4 x 93 mm



C-Clamp
Step Bolt
Assembly



Vertical
Eye Bolt
5/8 x 60 mm

